



Power Mac G4 MDD Optical Drive Cage Replacement

Written By: Chris Green



INTRODUCTION


The Power Mac G4 MDD Uses a removable cage supporting up to two IDE SuperDrives.



TOOLS:


- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Case

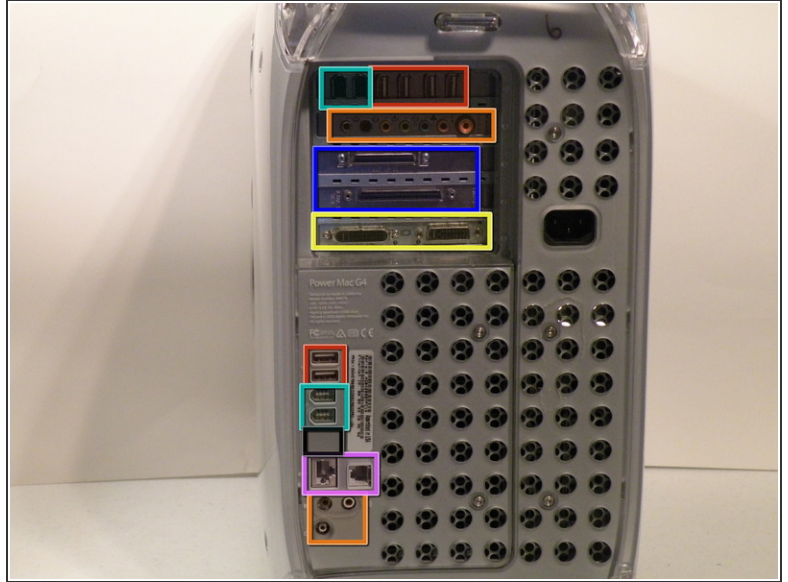


- The Power Mac G4 MDD: the last, and the fastest G4-based Mac. This computer boasted up to a Dual 1.42GHz PowerPC G4 CPU (though I have a single 1.25GHz).
- Six USB ports.
- Four FireWire ports.
- Assorted SCSI (SCSI50/SCSI68)
- Assorted Audio
- Video (ADC & DVI)
- Networking (RJ-45 Ethernet/56k Modem)
- Some later model MDD's (such as the dual 1.42GHz) Have a FireWire 800 Port Here:

Step 2

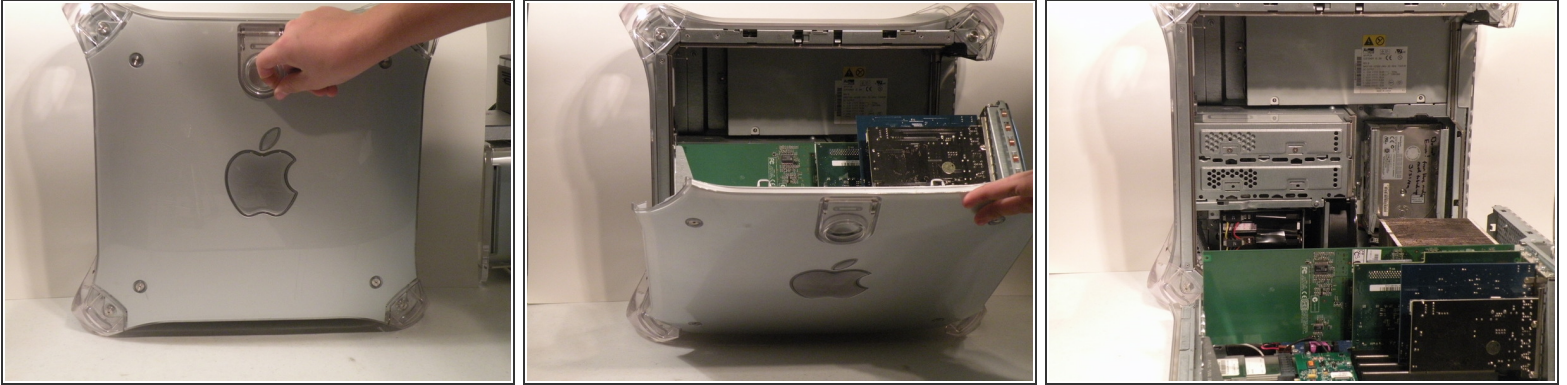


- Pull on the side lever and lower the side of the case.

Step 3 — Hard Drives

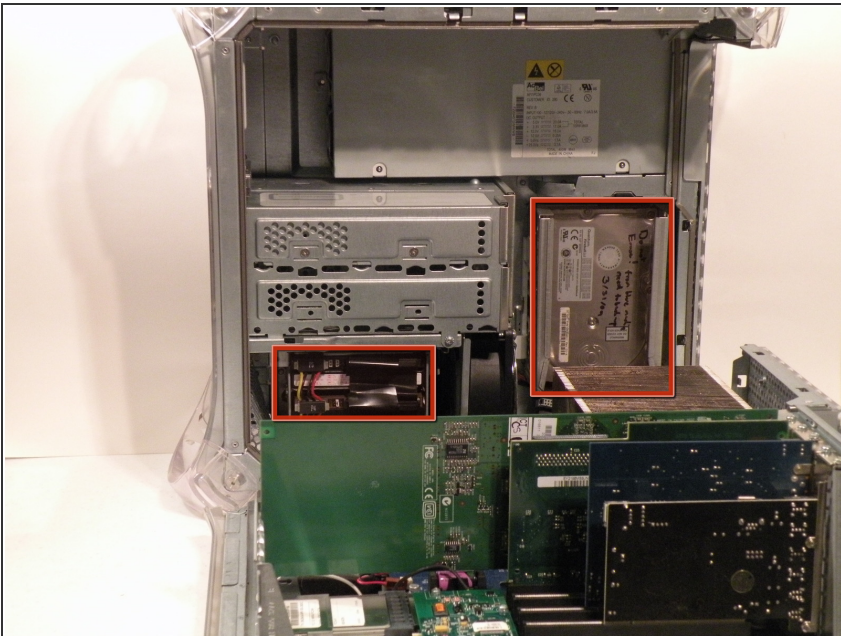


- The hard drive cages are located here.

Step 4

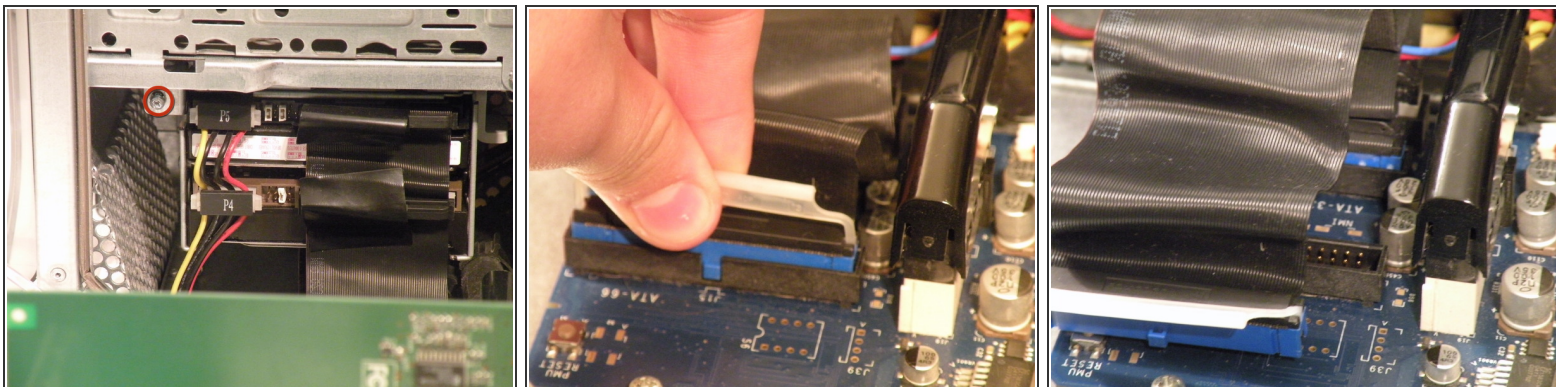

- Cage 1
- Start by removing this screw.
- Remove the IDE ribbon cable from the motherboard.

Step 5

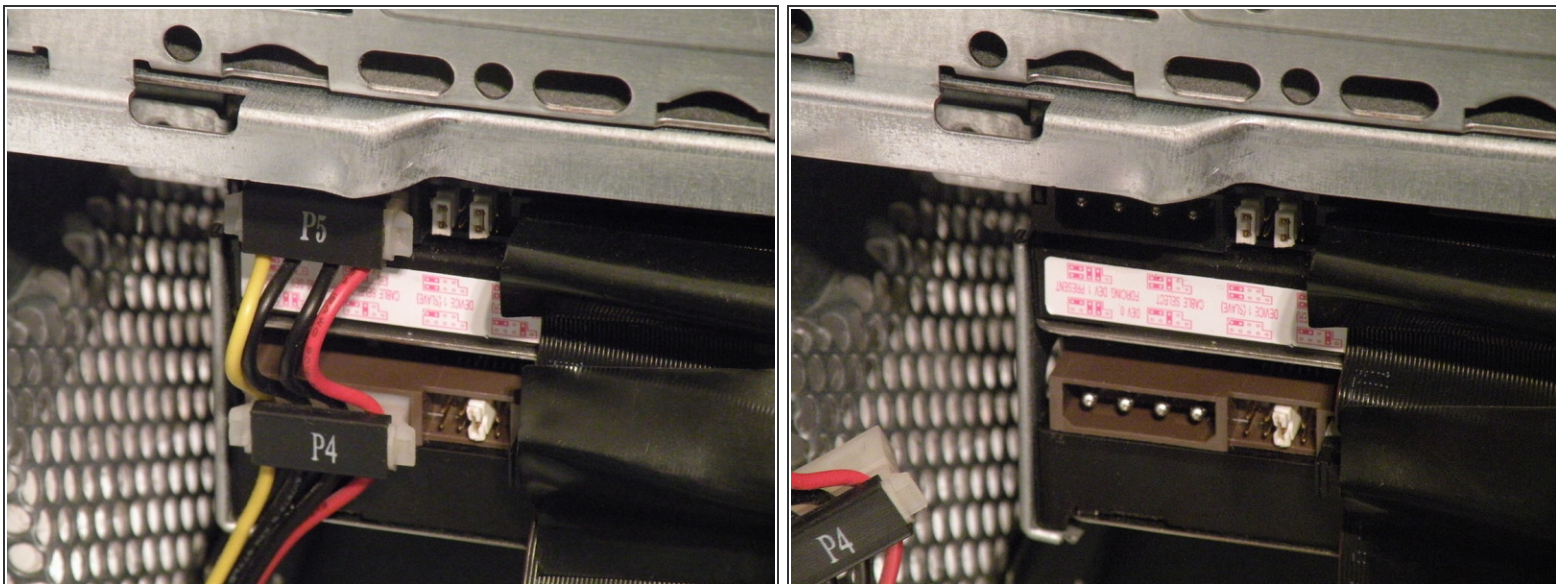


- Now, remove the power connector from the drives.

Step 6




- Now, push this tab down, and pull the cage towarded you.
- Now, you can set cage 1 aside.

Step 7

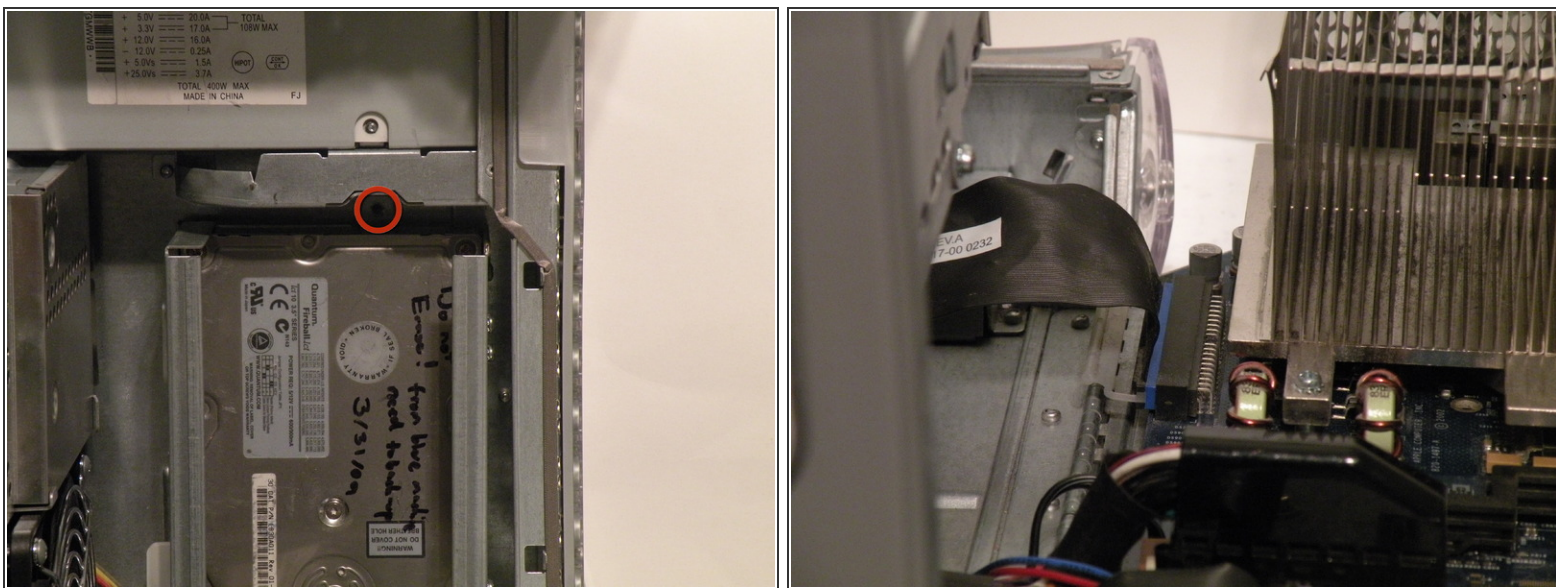


- Cage 2:
- Remove this Phillips screw:
- Disconnect this IDE ribbon cable from the logic board.

Step 8

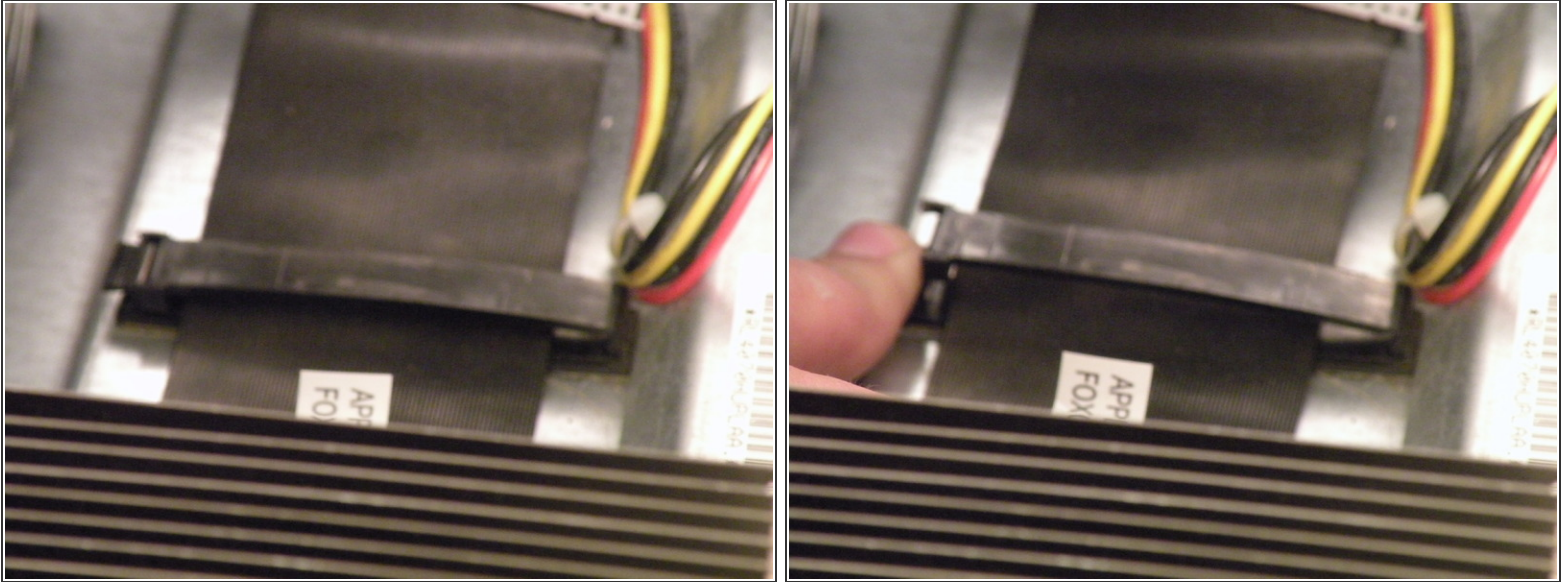

- It's likely that there is a cable clip holding the ribbon cable to the case.
- To remove it, push the end, and it should pop up.

Step 9

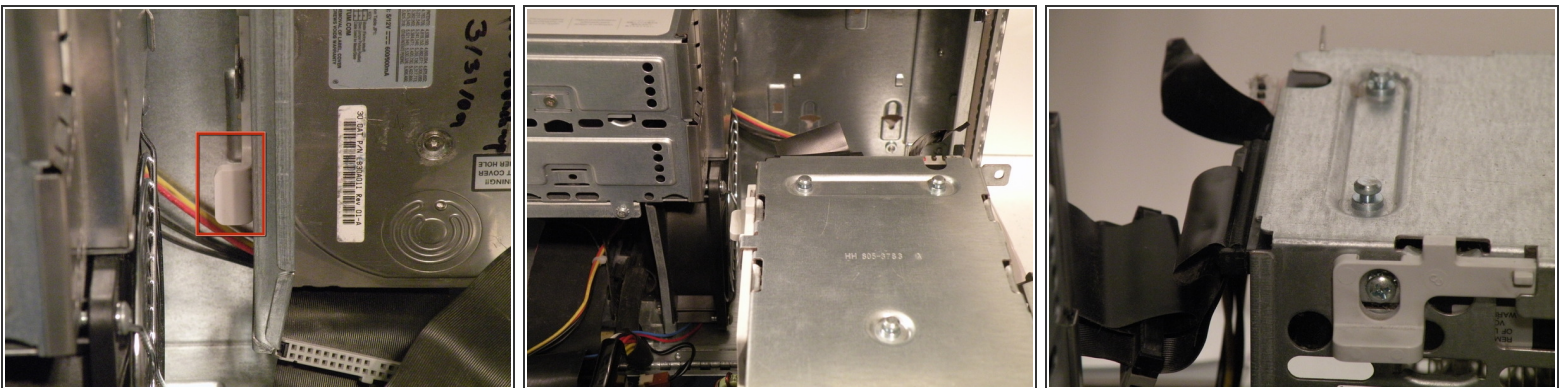


- With the clip free, pull on this tab, lift the cage up, until it clicks, and pull it away.
- Now, set the cage on top of the CPU, and remove the power connectors.

Step 10




- Once the cables are free, set the drive cage aside.
- To remove the hard drives from the cages, remove the four screws on the sides of the cage that are connected to the drives, then slide the drives out.
- The two cages are cross compatible and can be put in either rack.
- The MDD does not have a 128GB drive limit like older macs, My MDD has 3 Drives (A 400GB Hitachi Deskstar, 40GB Seagate Baracuda 7200.7, and a 30GB Quantum Fireball LCT).
- Note the ID jumpers on the two drive set. One is set to Master, the other to slave. A single drive can be set to Cable Select.

Step 11 — Optical Drive Cage

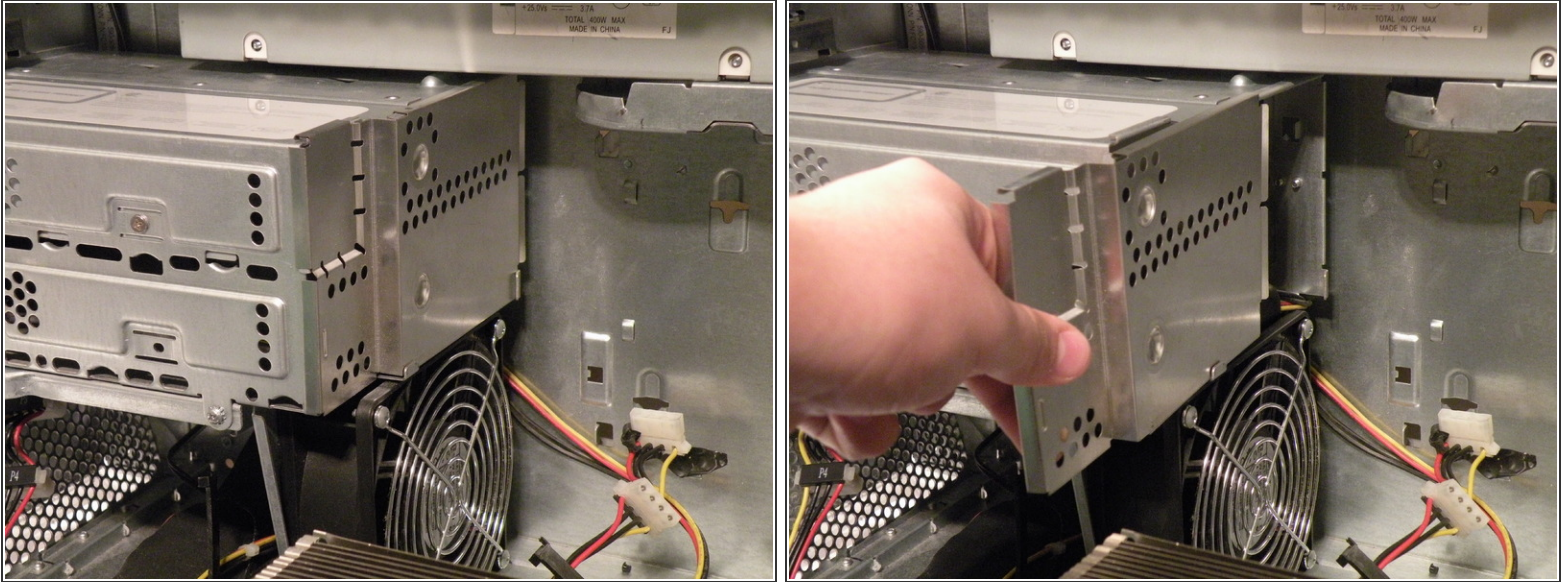


- Start removing the optical drive cage by removing the back cover.

Step 12

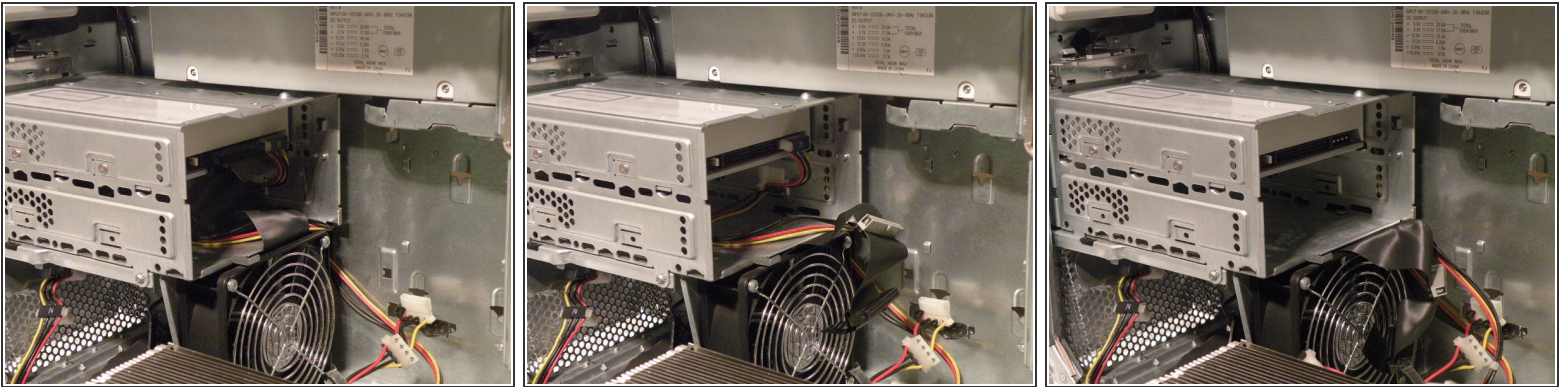

- Now, remove the IDE and power cables.

Step 13

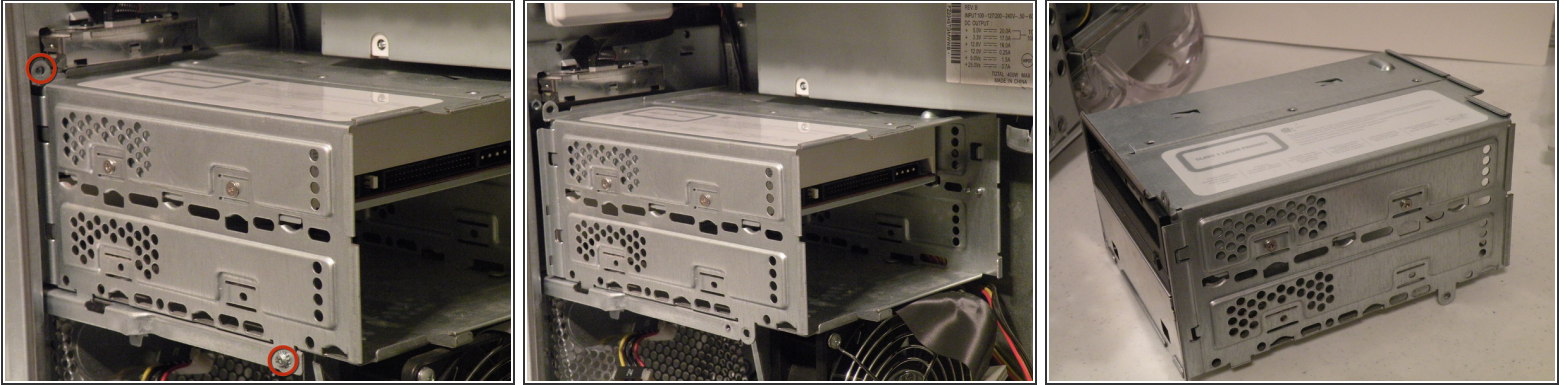

- Remove these two Phillips screws:
- Now, pull the cage away from the front until it is free.
- Now, lift the cage out.

Step 14



- To remove the drive from the cage, remove the four screws on the side of the drive, and pull the drive out of the cage.
- My MDD has a 3rd Party 22X SuperDrive, for burning DVD's in Leopard (Thank You Generic Drive Support!)

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 10:58:26 PM.